



100%
MADE IN
GERMANY

Universal Adapter-Set (AS)**

PROPERTIES

Resistance to: Ultraviolet rays, ozone, mineral oils, fuels, salts, alkalis, alcohol, hydrocarbons, ketones, ether, termites and radioactive rays*

Flame resistance: UL94 5VA (IEC 60695-11-20)
UL94 V-0 (IEC 60695-11-10)
IEC 61914 following IEC 60695-11-5
Classification following DIN 5510, part 2 Flammability class: S3

Thermal expansion: 0.01% per 10°C temperature increase

Tensile strength: 120 N/mm²

Flexural strength: 210 N/mm²

TEMPERATURE RANGE

Ambient temperature: down to -60°C*


Continuous operation: up to 120°C

Permitted short-term heating: up to 220°C

MATERIAL

High-grade polyamide, fibreglass-reinforced, coloured black, with special UV protection, fully recyclable, self-extinguishing, low-smoke, zero halogen (LSZH), non-toxic, non-corrosive, non-metallic, non-magnetic

Mounting example

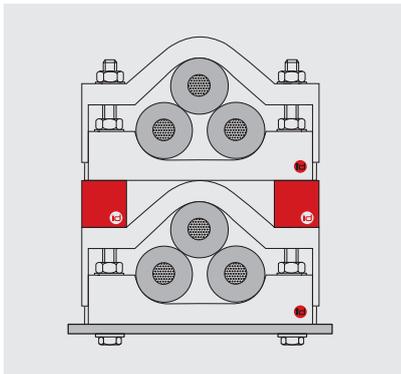


Legal compliance

- Directive 2015/863/EU (RoHS)
- Regulation (EC) No. 1907/2006 (REACH regulation)

Applications:

For secure stacking of KS Cable Clamps to a Double Tower

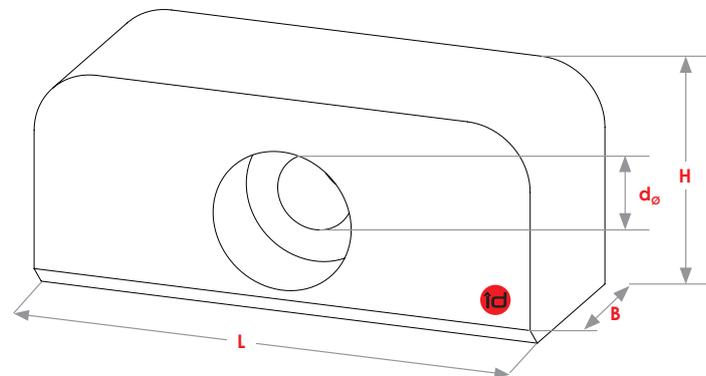

Dimensions in mm

Type	L	B	H	d _o	Screw thread
AS	78	31	34	12	M 10

* For further details, please contact id-Technik.

** An AS-Set consists of 2 identical parts.